


Product Specification

— Office Line Grid Panel Classic

Dear User:

Thank you for purchasing our products, please review this manual thoroughly to ensure proper installation and operation of this product.

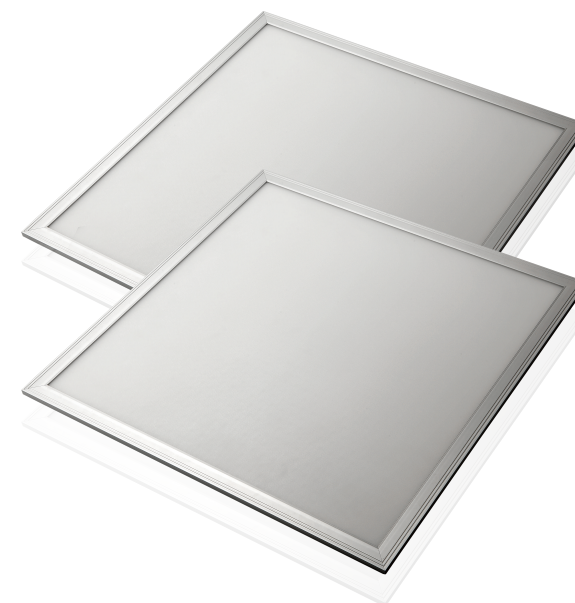

EAN 0761847390883 620x620 3000K warm white, white finish
 EAN 0761847390876 620x620 4000K natural white, white finish
 EAN 0761847390906 Recessed Frame, white finish
 EAN 0761847390906 Surface Frame, white finish

► The product description

The market leading LED flat panel is a kind of top grade indoor lighting. Make you Enjoy your life in comfortable LED lighting.

1. Lighting from the side edge, with even lighting, soft and non-glare surface. It adopts super bright SMD as its illuminant, energy saving more than 60%.
2. Using efficient constant current isolation driver, high PF .
3. Start fast, no noise.
4. Using the professional circuit design, each set of lights to work independently, Avoids single led failure affecting one group.
5. Anti-EMI, mercury-free, lead-free, green environmental protection, compliance with CE,RoHs requirements.
6. Normally use period of 3years.

► Product notice:

1. The product is suitable for indoor use only.
2. Before use, need to confirm the products are intact during transportation.
3. Packing materials stay away from children to prevent suffocation. Prevent the small accessories swallowed by children.
4. Keep children stay away from the product, forbidden to contact the electric Equipment.
5. Avoid eyes look straight at the LED light-emitting surface.
6. keep away from fire or high temperature object.
7. Non professional personnel are not allowed to disassemble and repair led light, our Company have the rights to refuse the replacement or warranty service for the unauthorized disassembly and repaired products.
8. Before cleaning, please be sure to shut off the power supply, and clean with dry cloth, do not use Chemical or corrosive items for cleaning.
9. Recommended temperature and humidity for this product: humidity 35%RH—75%RH, temperature:5℃—45℃
10. This product is not recommended for use in these conditions as below: bathroom, cold storage, basement and underground garage, near the boiler, ward in the hospital, surgery room etc. in which the temperature and humidity is high or which usually needs ultraviolet disinfection.
11. Use in extreme conditions (one or more conditions , such as high temperature, high humidity, use for long time etc.) may lead to yellowing of the LGP for this product within the warranty period, but yellowing has no effect on the safety of the product.

► Application:

Hotel;meeting room;factory or office;residential housing and public facilities,Commercial use,schools,hospitals,other lighting.

LED panel light installation drawing

Note before installation


1. This product must be installed by trained electricians.
2. Make sure no parts missing when unpacking and install the product.
3. Keep the product away from flammable materials at least 0.2m distance, pay attention To low-voltage electric line separated from high voltage wire.
4. Electricity wires on the pack of the panel can be fixed by clamp, to ensure firmly fixed.
5. Make sure the power cord of lamp long enough to avoid tension or tangential force. Avoid too much tension and tying knots. Differ the output wire with other lamps, pay Attention not to be confused.
6. Once installed, connect the lamp's input end with driver output end.
7. Connect the lamp's input end with city power, usually, brown line to live line, blue line To null line.
8. Don't use LED lamp drivers for other lamps.

Installation steps are as follows




▶ Recessed Luminaire


1. Remove the ceiling gypsum board .




2. Connect the power cord .



3. Put through the panel light along ceiling's diagonal.




4. Fix the panel light to suitable place and power on.




2


▶ Spring fastener installation



Fix four spring fasteners by screws to the panel light.




Pull up the spring fasteners in vertical, then snap into the cut hole.




Complete the installation.


▶ Ceiling mounting frame installation




Connect the three frames like a drawer with plastic corner connectors at both ends, and fix onto the roof.



Slot the panel light into the drawer frames ensuring it sits securely.





Lock the last frame in place by screws.



Complete the installation.

▶ Lifting type installation

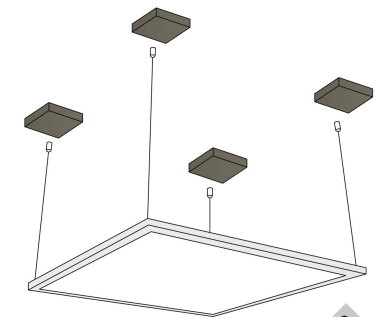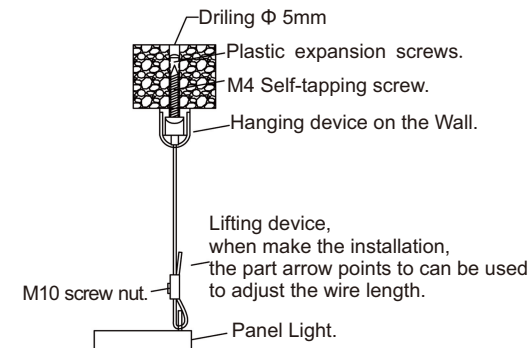

3