



PRODUCT SPECIFICATION

DESCRIPTION: Endurance URBAN Series

MODEL NO: URBAN 30 360°

1. Picture of product:



2. Features

※Housing: Die-casting aluminum, with high intensity and corrosion proof.

※Mounting type: Post top

※TOP PIPE MOUNTING DIA: 76mm


※Diffuser: Clear PC

※Finishing: Surface anti-aging electrostatic spray processing, super resistance to corrosion.


※Assembling height: 2-8M.

✘Suitable place: Plaza,park,Street residential areas

3.Product parameters

ITEM	symbol	Description	UNIT
Picture of real products			
Rated Voltage	VOLT	85~265 AC	V
Luminous flux	l	3600	LM
Power	P	30	W
Frequency	f	50~60	Hz
Light efficiency	η	>90	Lm/W
Power Factor	PF	>0.95	PF
Operating Temperature	TOP R	-40~+55℃	℃
Humidity	H	10%~95%	%
Protection Level	IP	65	IP
Pole mounting Dia.	DIA	76	MM
LED PIECE LED	PCS	40	PC
LED chip	Brand	Lumileds 3030	Brand
Driver brand	Brand	Meanwell XLG-50-H-A	Brand
Correlate Color Temperature	Tc	2700K~6500K	K
Beam Angle	Deg	90°	Deg
Color Rendering Index	CRI	>80	RA
THD	THD	<15%	THD
LED'S Operating Life	LIFE	>50000	Hours

4. Dimensions

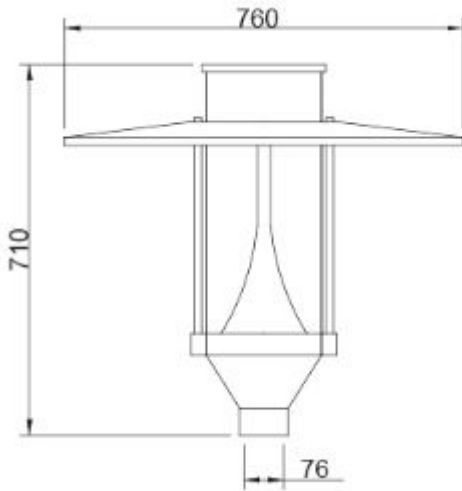

5. Packing Size

Housing: 530*530*750mm/4PCS/CTN

Cover: 780*780*400mm/27PCS/CTN

6. Attention

- ✘ Avoid heavy pressure is applied to the lamp, otherwise it will affect the stability of the product.
- ✘ Do not for a long time look directly at the luminaire, the lamp light can damage your eyes.
- ✘ According to the specification, use the product within the specified input voltage range.
- ✘ non-professionals may not be demolished.
- ✘ After opening, please carefully check whether the items are complete, if damaged, please contact the supplier immediately, do not try to use.

LClux® ist eine Marke der:

LC Handels GmbH – Keplerweg 3 – 48493 Wettringen
kontakt@lclux.de